


# RWC+ Condensing rotary heat exchanger

The first model of the new RW\_+ series is the RWC+ condensing rotary heat exchanger, **designed for maximum thermal efficiency and reliable operation** even at low outdoor temperatures.

**Premium quality and long-term operational reliability**, certified by Eurovent, result from the combination of our high corporate standards and advanced manufacturing technologies.



# Condensing rotary heat exchanger

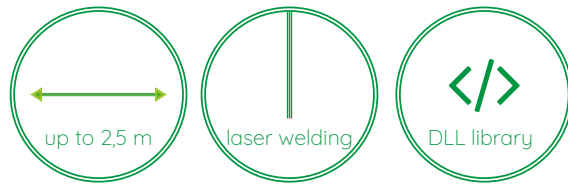

Wheel depth	Corrugation height	Foil thickness
200 mm	1,4 mm	0,055 mm
	1,5 mm	
	1,6 mm	

- ✓ Dimensions from 300 up to 2500 mm in a single-piece design
- ✓ Compact casing depth of 280 - 310 mm for air handling units
- ✓ Wide accessory options including casing and controls
- ✓ Maximum rigidity thanks to unique laser welding technology
- ✓ EUROVENT certified
- ✓ Short lead times - 3 weeks EXW
- ✓ Online selection software including DLL library
- ✓ Suitable for commercial and residential air handling units

## ONLINE CALCULATOR



Precise operating parameters can be easily calculated using our freely available online selection software.

