Product Key for Recutech Rotary Unit

X - XXX - XXX - 5 - XXXX / XXXX - XXXX - X X X - X X X X X - X

Wheel type

P	Condesation rotors
K	Epoxy rotors
S	Sorption rotors
E	Enthalpy rotors

Wave height

XXX / 100 = mm

Wave lenght

XXX / 100 = mm

Casing Height

B (mm)

Casing Width

A (mm)

Rotor Diameter

ø D (mm)

Casing Design

-	Without casing (only wheel)
W	Ready for operation rotary heat exchanger Rotor and casing delivered in one piece (available up to size 2500 mm)

Casing construction

G	For installation in air conditions systém. Optional access to internal parts Without sides panels

Casing material

V	Galvanized steel

Drive unit

-	Without drive unit
DRHX1	OJ Electronic, AC, 230V, 55W, 1 phase
DRHX2	OJ Electronic, AC, 230V, 220W, 1 phase

Purge sector

N	No purge sector
P	5° purge sector

P-160-400-5-0600/0600-0500-WGV-DRHX1-N Example product key for Rotary unit

P-160-400-5-XXXX/XXXX-0500-XXX-XXXX-X Example product for wheel only

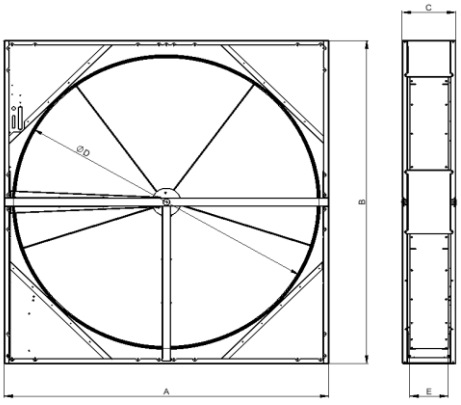

øD [mm]	A [mm]	B [mm]	C [mm]	E [mm]	STYLE
400 - 1350	ØD + 100	ØD + 100	280	200	UNDIVIDED
1351 - 1700	ØD + 150	ØD + 150	280	200	UNDIVIDED
1701 - 2500	ØD + 150	ØD + 150	310	200	UNDIVIDED